

MALLEABLE IRON/HOT DIPPED GALVANIZED MOGULS WITH COVER, GASKET & ROLLERS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION

- Larger body size facilitates pulling of large and heavy conductors. Specially designed raised cast covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES

- Exclusive built-in rollers facilitate cable pulling from sizes 1 1/4" - 4".
- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapered, tapered threads for tight, rigid joints and ground continuity.
- Covers have captive stainless steel screws to speed installation, prevent 'freezing' of screws.
- Length Requirement: distance between centerline of each hub bushing (conduit stop) exceeds eight times the trade diameter of the conduit per NEC 314.28(A)(2).

STANDARD MATERIALS


Bodies and Covers: Malleable Iron

Gaskets: Neoprene

Screws: Stainless Steel

STANDARD FINISH

Bodies and Covers: Hot-Dipped Galvanized

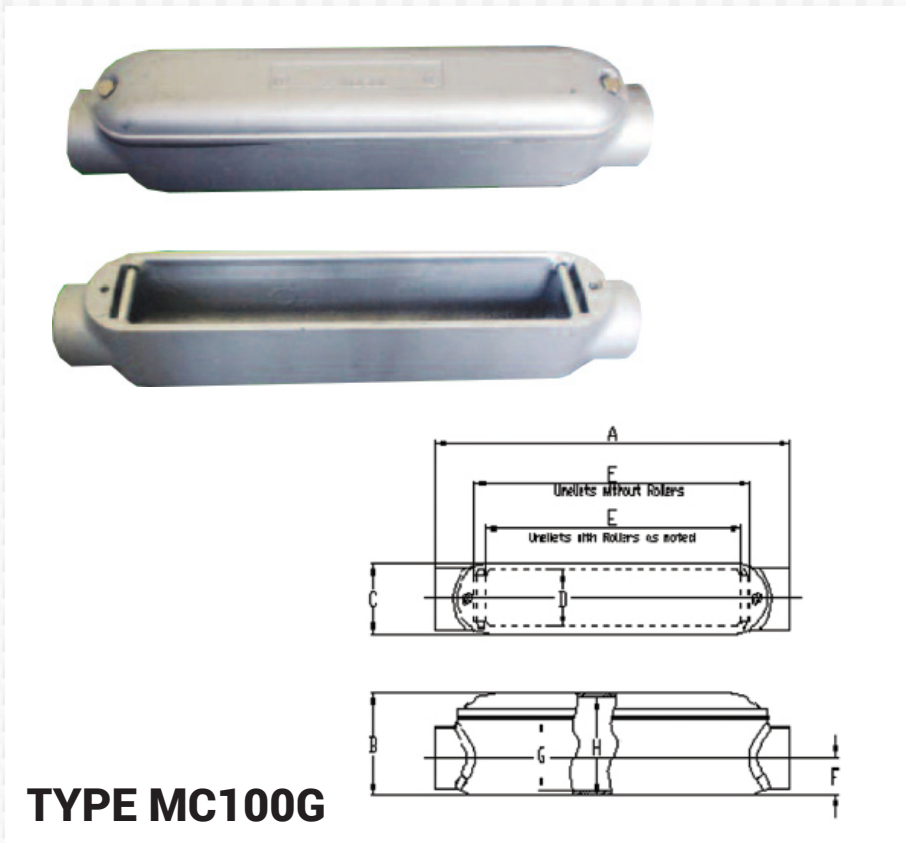

TYPE MC100G

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC#
MC100G	1"	3 #2 AWG	31.00	—	1	390	10039
MC125G	1-1/4"	3 #1/0 AWG	50.00	—	1	506	10040
MC150G	1-1/2"	3 #3/0 AWG	93.00	—	1	923	10041
MC200G	2"	3 #300 MCM	143.00	—	1	1327	10042
MC250G	2-1/2"	3 #400 MCM	335.00	—	1	2751	10043
MC300G	3"	3 #700 MCM	475.00	—	1	3618	10044
MC350G	3-1/2"	3 #900 MCM	830.00	—	1	5464	10045
MC400G	4"	3 #1000 MCM	1010.00	—	1	6478	10046

CATALOG NUMBER	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	NUMBER OF COVER HOLES
MC100G	9.88	2.78	2.36	1.85	6.61	0.93	1.82	2.46	2
MC125G	12.20	3.43	2.44	1.93	7.83	1.14	2.27	3.11	2
MC150G	14.17	3.86	3.15	2.56	9.88	1.34	2.57	3.43	2
MC200G	18.15	4.41	3.15	2.52	13.29	1.63	3.13	3.98	2
MC250G	23.35	5.22	4.65	3.74	13.68	1.81	3.61	4.72	4
MC300G	27.17	6.06	4.72	3.66	21.04	2.20	4.45	5.57	4
MC350G	31.57	7.05	5.72	4.57	24.98	2.50	4.72	6.50	4
MC400G	35.55	7.56	5.72	4.57	29.11	2.76	5.23	7.01	4