

MALLEABLE IRON/**HOT DIPPED GALVANIZED** MOGULS WITH COVER, GASKET & ROLLERS

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION

- Larger body size facilitates pulling of large and heavy conductors. Specially designed raised cast covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES


- Exclusive built-in rollers facilitate cable pulling from sizes 1 1/4" - 4".
- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapered, tapered threads for tight, rigid joints and ground continuity.
- Covers have captive stainless steel screws to speed installation, prevent 'freezing' of screws.
- Length Requirement: distance between centerline of each hub bushing (conduit stop) exceeds six times the trade diameter of the conduit per NEC 314.28(A)(2).

STANDARD MATERIALS

Bodies and Covers: Malleable Iron
Gaskets: Neoprene
Screws: Stainless Steel

STANDARD FINISH

Bodies and Covers: Hot-Dipped Galvanized

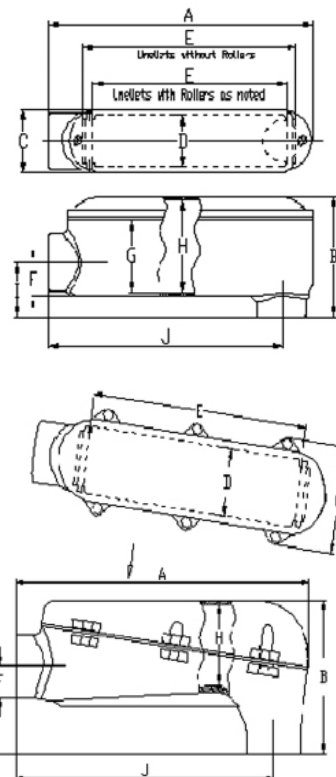

TYPE MLB100G

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC#
MLB100G	1"	3 #2 AWG	31.00	—	1	366	10047
MLB125G	1-1/4"	3 #1/0 AWG	48.00	—	1	476	10048
MLB150G	1-1/2"	3 #3/0 AWG	107.00	—	1	831	10049
MLB200G	2"	3 #300 MCM	145.00	—	1	1224	10050
MLB250G	2-1/2"	3 #400 MCM	210.00	—	1	2104	10055
MLB300G	3"	3 #700 MCM	345.00	—	1	3237	10052
MLB350G	3-1/2"	3 #900 MCM	500.00	—	1	4427	10053
MLB400G	4"	3 #1000 MCM	740.00	—	1	5865	10054

CATALOG NUMBER	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM I	DIM J	NUMBER OF COVER HOLES
MLB100G	8.90	3.75	2.38	1.87	6.57	0.94	1.88	2.52	1.89	7.87	2
MLB125G	9.65	4.86	2.40	1.89	6.47	1.16	2.70	3.52	2.19	8.48	2
MLB150G	12.95	5.25	3.07	2.40	9.49	1.38	3.09	4.07	2.36	11.63	2
MLB200G	14.65	6.38	3.11	2.52	10.91	1.61	3.46	4.96	2.64	12.94	2
MLB250G	18.22	8.23	5.79	3.60	13.48	2.15	—	4.36	4.69	16.03	6
MLB300G	21.33	10.37	5.79	3.47	16.95	2.75	—	5.27	5.61	18.62	6
MLB350G	24.65	10.97	6.93	4.53	19.94	3.01	—	5.15	6.63	21.55	6
MLB400G	27.67	13.03	7.01	4.57	23.38	3.43	—	6.85	7.05	24.32	6