

MALLEABLE IRON/HOT DIPPED GALVANIZED MOGULS WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION

- Larger body size facilitates pulling of large and heavy conductors. Specially designed raised cast covers provide additional wiring area.
- SEPCO Moguls are used for pulling straight, 45° or 90° angle turns and/or making taps and splices.

FEATURES


- Smooth, rounded integral bushing in each hub protects conductor insulation.
- Accurately tapered, tapered threads for tight, rigid joints and ground continuity.
- Covers have captive stainless steel screws to speed installation, prevent 'freezing' of screws.
- Length Requirement: distance between centerline of each hub bushing (conduit stop) exceeds six times the trade diameter of the conduit per NEC 314.28(A)(2).

STANDARD MATERIALS

Bodies and Covers: Malleable Iron
Gaskets: Neoprene
Screws: Stainless Steel

STANDARD FINISH

Bodies and Covers: Hot-Dipped Galvanized

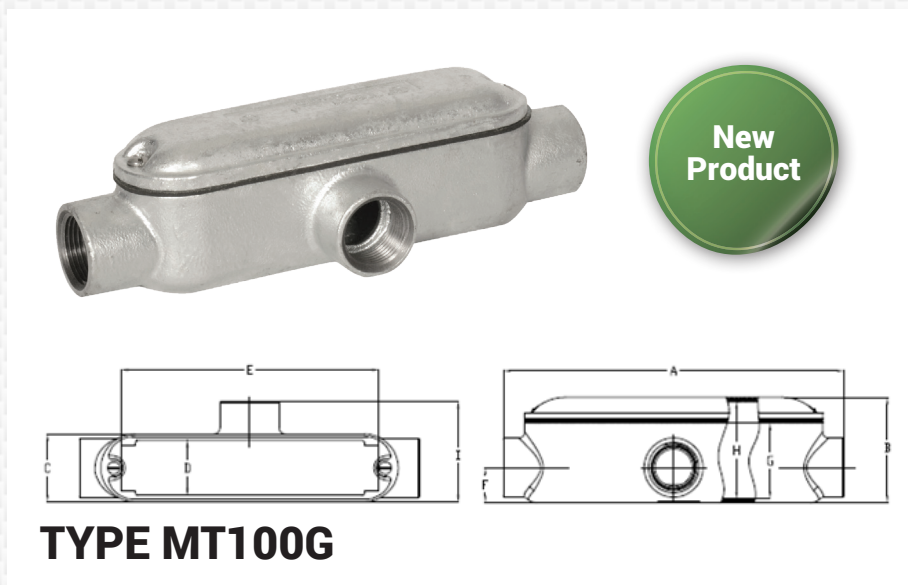

TYPE MT100G

CATALOG NUMBER	TRADE SIZE	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC#
MT100G	1"	3 #4 AWG	31	-	1	187	10154
MT125G	1-1/4"	3 #2 AWG	50	-	1	263	10155
MT150G	1-1/2"	3 #1/0 AWG	93	-	1	447	10156
MT200G	2"	3 #4/0 AWG	143	-	1	651	10157

CATALOG NUMBER	DIM A	DIM B	DIM C	DIM D	DIM E	DIM F	DIM G	DIM H	DIM I	NUMBER OF COVER HOLES
MT100G	9.88	2.80	2.36	1.85	6.61	0.93	1.84	2.48	3.27	2
MT125G	12.64	3.44	2.44	1.93	7.60	1.14	2.28	3.13	3.39	2
MT150G	14.17	3.88	3.15	2.56	9.68	1.34	2.57	3.46	4.00	2
MT200G	18.15	4.43	3.15	2.52	13.09	1.63	3.14	4.02	4.02	2