

ALUMINUM THREADED CONDUIT BODIES WITH COVER AND GASKET

FOR THREADED RIGID CONDUIT AND IMC

APPLICATION

To provide access to conductors for pulling, splicing, and maintenance. Threaded for rigid conduit and IMC

FEATURES


- Tapered threaded hubs (NPT)
- Assembled with neoprene gasket and stamped cover
- Die cast from high-strength, corrosion and weather resistant, copper-free aluminum alloy.
- Flat back design for easy mounting close to walls

STANDARD MATERIALS

1/2" - 2"
Die cast/Copper-free Aluminum
2-1/2" - 4"
Sand-cast/Copper-free Aluminum

STANDARD FINISH

Aluminum Enameled

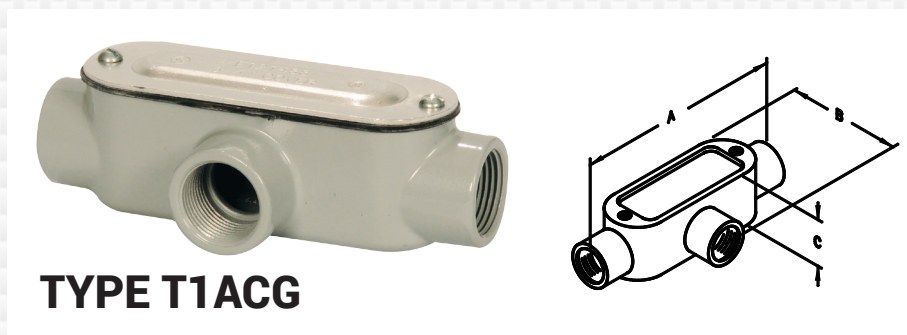

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	MAX WIRE SIZE	VOL. CU.IN.	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
T Type										
T1ACG	1/2"	4.75	2.06	1.38	N/A	4.35	10	50	23	10069
T2ACG	3/4"	5.56	2.25	1.63	3 #6 AWG	7.25	10	50	38	10070
T3ACG	1"	6.44	2.63	1.88	3 #4 AWG	12.20	5	25	53	10071
T4ACG	1-1/4"	8.25	3.56	2.50	3 #2 AWG	33.10	-	10	100	10072
T5ACG	1-1/2"	8.38	3.56	2.50	3 #1/0 AWG	33.10	-	10	98	10073
T6ACG	2"	10.69	4.38	3.13	3 #4/0 AWG	67.00	-	5	265	10074
T7ACG	2-1/2"	13.25	5.75	4.00	3 #4/0 AWG	67.00	-	1	375	10075
T8ACG	3"	13.25	5.75	4.50	3 #4/0 AWG	175.00	-	1	444	10076
T9ACG	3-1/2"	16.13	7.69	5.63	3 #400 MCM	298.00	-	1	1146	10077
T10ACG	4"	16.13	7.69	5.63	3 #400 MCM	300.00	-	1	1079	10078