

# MALLEABLE IRON CONDUIT NIPPLES

## FOR THREADED RIGID CONDUIT AND IMC

### APPLICATION

Used through knockout to connect box to conduit coupling. Used with a locknut to connect two boxes side by side or back to back. Used with a locknut to connect fixture housing to continuous runs.

### FEATURES


- Available with insulated Throat.
- With rigid conduit threads (NPS)

### STANDARD MATERIALS

Malleable Iron

### STANDARD FINISH


Zinc Plated

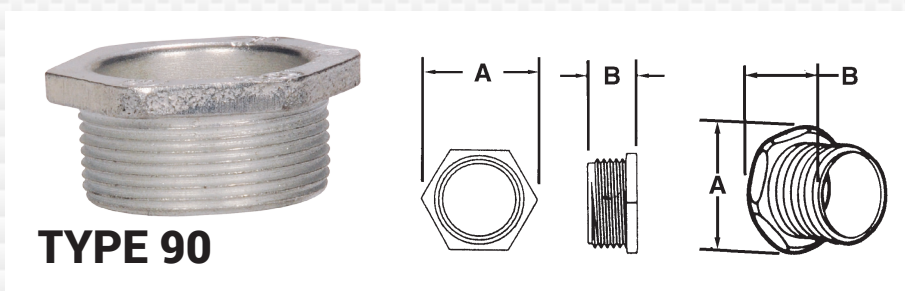

## TYPE 90

| CATALOG NUMBER | TRADE SIZE | DIM A | DIM B | UNIT PACK | MASTER PACK | LBS. / 100 PCS. | UPC # |
|----------------|------------|-------|-------|-----------|-------------|-----------------|-------|
| 90             | 1/2"       | 1.050 | 0.585 | 100       | 1000        | 6               | 19001 |
| 91             | 3/4"       | 1.310 | 0.545 | 100       | 1000        | 8               | 19101 |
| 92             | 1"         | 1.640 | 0.710 | 50        | 500         | 15              | 19201 |
| 93             | 1-1/4"     | 2.095 | 0.840 | 25        | 250         | 24              | 19301 |
| 94             | 1-1/2"     | 2.410 | 0.835 | -         | 25          | 28              | 19401 |
| 95             | 2"         | 2.945 | 0.900 | -         | 25          | 38              | 19501 |
| 96             | 2-1/2"     | 3.955 | 1.200 | -         | 15          | 71              | 19601 |
| 97             | 3"         | 4.390 | 1.490 | -         | 10          | 124             | 19701 |
| 98             | 3-1/2"     | 4.925 | 1.395 | -         | 10          | 163             | 19801 |
| 99             | 4"         | 5.420 | 1.395 | -         | 10          | 199             | 19901 |
| 995            | 5"         | 6.950 | 1.800 | -         | 5           | 331             | 19951 |
| 996            | 6"         | 8.370 | 2.165 | -         | 5           | 441             | 19961 |

### Insulated Throat

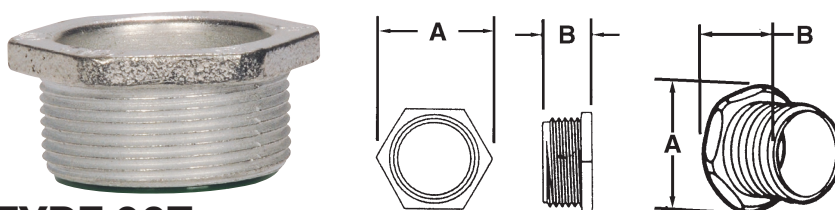

## TYPE 90T

| CATALOG NUMBER | TRADE SIZE | DIM A | DIM B | UNIT PACK | MASTER PACK | LBS. / 100 PCS. | UPC # |
|----------------|------------|-------|-------|-----------|-------------|-----------------|-------|
| 90T            | 1/2"       | 1.050 | 0.585 | 100       | 1000        | 6               | 19003 |
| 91T            | 3/4"       | 1.310 | 0.545 | 100       | 1000        | 8               | 19103 |
| 92T            | 1"         | 1.640 | 0.710 | 50        | 500         | 15              | 19203 |
| 93T            | 1-1/4"     | 2.095 | 0.840 | 25        | 250         | 24              | 19303 |
| 94T            | 1-1/2"     | 2.410 | 0.835 | -         | 25          | 28              | 19403 |
| 95T            | 2"         | 2.945 | 0.900 | -         | 25          | 38              | 19503 |
| 96T            | 2-1/2"     | 3.955 | 1.200 | -         | 15          | 72              | 19603 |
| 97T            | 3"         | 4.390 | 1.490 | -         | 10          | 125             | 19703 |
| 98T            | 3-1/2"     | 4.925 | 1.395 | -         | 10          | 166             | 19803 |
| 99T            | 4"         | 5.420 | 1.395 | -         | 10          | 202             | 19903 |
| 995T           | 5"         | 6.950 | 1.800 | -         | 5           | 336             | 19953 |
| 996T           | 6"         | 8.370 | 2.165 | -         | 5           | 448             | 19963 |