

# MALLEABLE IRON 45° LIQUIDTIGHT CONNECTORS

FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

## APPLICATION

To secure, ground and seal Liquidtight Flexible Metal conduit to boxes and enclosures.

## FEATURES



- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with an insulated throat with steel locknut and sealing ring
- Liquidtight/Raintight/Concrete tight/Oiltight
- Suitable for wet locations
- Long ferrule prevents pullout and tight bend conduit "pop-out"
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

## STANDARD MATERIALS

Malleable Iron/Steel Ferrule

## STANDARD FINISH

Zinc Plated

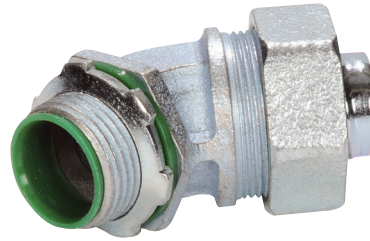

## TYPE SLT35-45T

### All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	KO SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS.	UPC #
SLT25-45T	3/8"	1/2"	0.590	0.793	1.14	0.50	1.15	1.48	10	100	29	14825
SLT35-45T	1/2"	1/2"	0.590	0.793	1.25	0.50	1.28	1.51	10	100	29	14835
SLT36-45T	3/4"	3/4"	0.785	1.020	1.28	0.52	1.55	1.54	10	100	42	14836
SLT37-45T	1"	1"	0.980	1.261	1.43	0.65	1.80	1.81	5	50	66	14837
SLT38-45T	1-1/4"	1-1/4"	1.330	1.605	1.50	0.66	2.25	2.16	-	10	90	14838
SLT39-45T	1-1/2"	1-1/2"	1.530	1.844	1.61	0.73	2.44	2.43	-	10	112	14839
SLT40-45T	2"	2"	1.995	2.337	1.76	0.75	2.97	2.82	-	5	179	14840
SLT65-45T	2-1/2"	2-1/2"	2.341	2.797	2.18	1.01	4.01	4.41	-	1	582	14865
SLT66-45T	3"	3"	2.939	3.418	2.50	1.15	4.18	5.50	-	1	869	14866
SLT67-45T	3-1/2"	3-1/2"	3.406	3.915	2.61	1.18	5.25	5.93	-	1	1296	14867
SLT68-45T	4"	4"	3.882	4.411	2.74	1.25	5.78	8.34	-	1	1539	14868

## OPTIONAL FINISH

For additional corrosion protection, specify Mechanical Galvanized. Add suffix 'MG' to Malleable Iron catalog number. Example SLT35-45TMG. For more information, see page 18.

