

MALLEABLE IRON STRAIGHT LIQUIDTIGHT CONNECTORS

WITH COPPER LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION

Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES

- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with Insulated throat, steel locknut, and sealing ring
- Liquidtight/Raintight/Concrete tight/Oiltight
- Suitable for grounding & wet locations
- Long ferrule prevents pullout and tight bend conduit 'pop-out'
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

STANDARD MATERIALS

Malleable Iron/Steel Ferrule/
Copper Grounding Lug


STANDARD FINISH

Zinc Plated/Natural



OPTIONAL FINISH

For additional corrosion protection, specify Mechanical Galvanized. Add suffix 'MG' to Malleable Iron catalog number. Example SLT27CLTMG. For more information, see page 19.

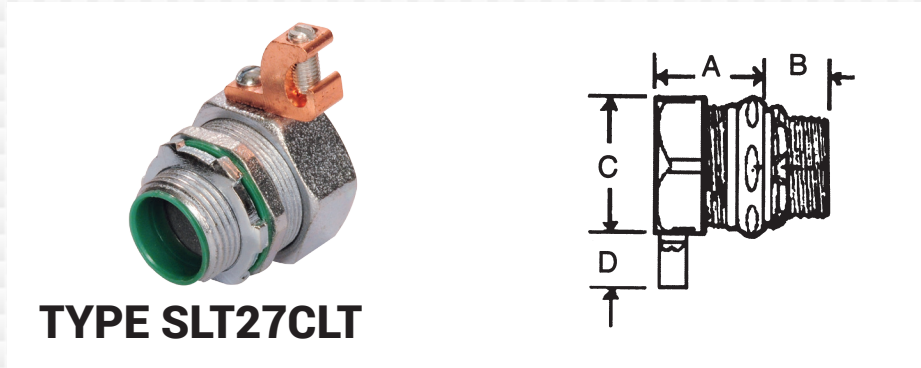

TYPE SLT27CLT

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS.	UPC #
SLT47CLT	3/8"	#4-#14	0.590	0.793	1.14	0.50	1.15	0.75	25	250	18	50000
SLT27CLT	1/2"	#4-#14	0.590	0.793	1.25	0.50	1.28	0.75	25	250	20	50001
SLT28CLT	3/4"	#4-#14	0.785	1.020	1.28	0.52	1.55	0.75	10	100	31	50002
SLT29CLT	1"	#4-#14	0.980	1.261	1.43	0.65	1.80	0.75	5	50	42	50003
SLT30CLT	1-1/4"	#4-#14	1.330	1.605	1.50	0.66	2.25	0.75	5	50	57	50004
SLT31CLT	1-1/2"	#4-#14	1.530	1.844	1.61	0.73	2.44	0.75	10	50	73	50005
SLT32CLT	2"	#4-#14	1.995	2.337	1.76	0.75	2.97	0.75	5	25	101	50006
SLT33CLT	2-1/2"	#1/0-#8	2.341	2.797	2.18	1.01	4.01	1.13	1	10	373	50007
SLT34CLT	3"	#1/0-#8	2.939	3.418	2.50	1.15	4.18	1.13	1	10	465	50008
SLT60CLT	3-1/2"	#3/0-#6	3.406	3.915	2.61	1.18	5.25	1.50	1	10	686	50009
SLT61CLT	4"	#3/0-#6	3.882	4.411	2.74	1.25	5.78	1.50	1	5	807	50010
SLT62CLT	5"	#6-#250MCM	391.77	460.78	3.13	1.50	6.06	1.69	-	1	1058	50011
SLT63CLT	6"	#6-#250MCM	484.65	570.18	3.13	1.56	7.50	1.69	-	1	1395	50012

Also available with aluminum lugs. See page 127.

