

MALLEABLE IRON/**MECHANICAL GALVANIZED** 45° LIQUIDTIGHT CONNECTORS

FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION

To secure, ground and seal Liquidtight Flexible Metal conduit to boxes and enclosures.

FEATURES


- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with an insulated throat with steel locknut and sealing ring
- Liquidtight/Raintight/Oiltight
- Suitable for wet locations
- Long ferrule prevents pullout and tight bend conduit "pop-out"
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

STANDARD MATERIALS


Malleable Iron/Steel Ferrule

STANDARD FINISH

Sizes 1/2" - 2" - Mechanical Galvanized
Sizes 2 1/2" - 4" - Hot Dipped Galvanized

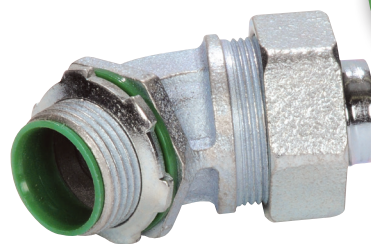

New Product



TYPE SLT35-45TMG

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	KO SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS./100 PCS.	UPC #
SLT35-45TMG	1/2"	1/2"	0.590	0.793	1.25	0.50	1.28	1.51	10	100	29	16407
SLT36-45TMG	3/4"	3/4"	0.785	1.020	1.28	0.52	1.55	1.54	10	100	42	16412
SLT37-45TMG	1"	1"	0.980	1.261	1.43	0.65	1.80	1.81	5	50	66	16417
SLT38-45TMG	1-1/4"	1-1/4"	1.330	1.605	1.50	0.66	2.25	2.16	-	10	90	16422
SLT39-45TMG	1-1/2"	1-1/2"	1.530	1.844	1.61	0.73	2.44	2.43	-	10	112	16427
SLT40-45TMG	2"	2"	1.995	2.337	1.76	0.75	2.97	2.82	-	5	179	16432
*SLT65-45TG	2-1/2"	2-1/2"	2.341	2.797	2.18	1.01	4.01	4.41	-	1	582	16437
*SLT66-45TG	3"	3"	2.939	3.418	2.50	1.15	4.18	5.50	-	1	869	16442
*SLT67-45TG	3-1/2"	3-1/2"	3.406	3.915	2.61	1.18	5.25	5.93	-	1	1296	16447
*SLT68-45TG	4"	4"	3.882	4.411	2.74	1.25	5.78	8.34	-	1	1539	16452

*Hot Dipped Galvanized

