

MALLEABLE IRON/**MECHANICAL GALVANIZED** 45° LIQUIDTIGHT CONNECTORS

WITH COPPER LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION

Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES



- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with Insulated throat, steel locknut, and sealing ring
- Liquidtight/Raintight/Oiltight
- Suitable for grounding
- Long ferrule prevents pull-out and tight bend conduit "pop-out"
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I.

STANDARD MATERIALS

Malleable Iron/Steel Ferrule/Copper Grounding Lug

STANDARD FINISH

Sizes 1/2" - 2" - Mechanical Galvanized
 Sizes 2 1/2" - 4" - Hot Dipped Galvanized

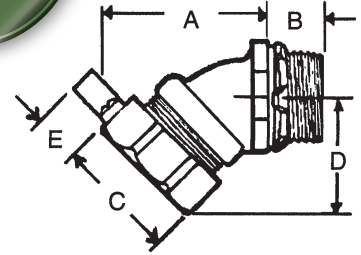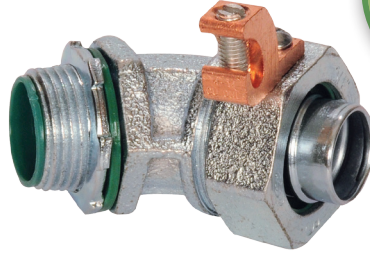

TYPE SLT35-45CLTMG

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
SLT35-45CLTMG	1/2"	#4-#14	0.590	0.793	1.64	0.50	1.28	1.51	0.75	10	100	20	50569
SLT36-45CLTMG	3/4"	#4-#14	0.785	1.020	1.68	0.52	1.55	1.54	0.75	10	100	31	50572
SLT37-45CLTMG	1"	#4-#14	0.980	1.261	2.16	0.65	1.80	1.81	0.75	5	50	42	50575
SLT38-45CLTMG	1-1/4"	#4-#14	1.330	1.605	2.50	0.66	2.25	2.16	0.75	-	10	57	50578
SLT39-45CLTMG	1-1/2"	#4-#14	1.530	1.844	3.10	0.73	2.44	2.43	0.75	-	10	73	50581
SLT40-45CLTMG	2"	#4-#14	1.995	2.337	3.28	0.75	2.97	2.82	0.75	-	5	101	50584
*SLT65-45CLTG	2-1/2"	#1/0-#8	2.341	2.797	6.67	1.01	4.01	4.41	1.13	-	1	373	50587
*SLT66-45CLTG	3"	#1/0-#8	2.939	3.418	8.01	1.15	4.18	5.50	1.13	-	1	465	50590
*SLT67-45CLTG	3-1/2"	#3/0-#6	3.406	3.915	9.55	1.18	5.25	5.93	1.50	-	1	686	50593
*SLT68-45CLTG	4"	#3/0-#6	3.882	4.411	10.64	1.25	5.78	8.34	1.50	-	1	807	50596

*Hot Dipped Galvanized

