

ZINC CABLE AND CONDUIT CONNECTORS

FOR NON-METALLIC SHEATHED CABLE

APPLICATION

Used to connect non-metallic sheath cable and flexible cord from 0.290 to 0.450 in. in diameter to outlet boxes, enclosures, or raceway systems in dry locations.

FEATURES



- Assembled with die cast locknut and tri-combo screws

STANDARD MATERIALS

Zinc Die Cast



Romex Connector

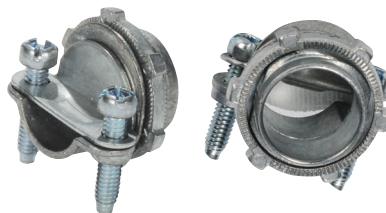

TYPE C23

CATALOG NUMBER	TRADE SIZE	DIM. A MIN.	DIM. A MAX	DIM B	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
C23	3/8"	0.64	0.18	1.21	100	1000	5	31232

One or two non-metallic cable 14-2 to 12-2 or 0.29" to 0.45" diameter flexible cord

*Please see Cable Chart for Cable Connectors on page 170.

APPLICATION

Non-watertight. To make a termination of non-metallic sheathed cable and service entrance.

FEATURES



- Assembled with die cast locknut and tri-combo screws

STANDARD MATERIALS

Zinc Die Cast



Service Entrance Connector

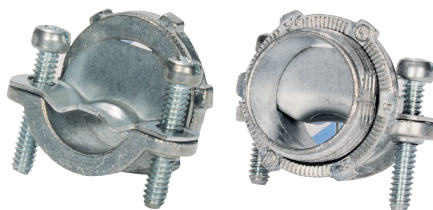

TYPE SC1

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
SC1	3/4"	0.450	1.031	1.220	25	250	10	32012
SC2	1"	0.645	1.190	1.500	20	200	16	32022
SC3	1-1/4"	0.660	1.330	1.900	10	100	25	32031
SC4	1-1/2"	0.740	1.470	2.115	10	100	36	32042
SC5	2"	0.750	1.620	2.640	5	50	50	32052

CATALOG NUMBER	SE/OVAL DIAMETER IN.	SER/ROUND DIAMETER IN.
SC1	(.52 by .61) and (.51 by .80)	(.57) and (.69)
SC2	(.51 by .80) and (.62 by .975)	(.69) and (.92)
SC3	(1.065 by 0.635) and (1.250 by 0.740)	-
SC4	(1.065 by 0.635) and (1.250 by 0.740)	-
SC5	(1.405 by 0.875) and (1.450 by 0.875)	-

*Please see Cable Chart for Cable Connectors on page 170.