

COMBINATION COUPLINGS

FOR RIGID CONDUIT, IMC AND E.M.T.

APPLICATION

To join E.M.T. to Rigid or IMC

FEATURES

- Threaded rigid and IMC to compression E.M.T.
- Concrete tight
- NPT female hub

STANDARD MATERIALS


Steel

STANDARD FINISH

Zinc Plated



For EMT Steel Compression to Threaded Rigid Couplings

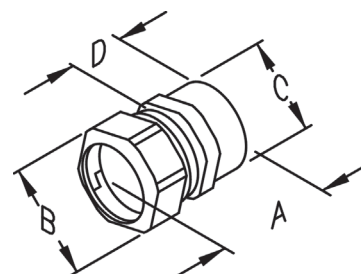

TYPE ERC-23

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
ERC-22	1/2"	1.313	1.125	0.875	0.688	25	250	14	47322
ERC-23	3/4"	1.438	1.375	1.125	0.750	25	250	25	47323
ERC-24	1"	1.500	1.688	1.375	0.813	25	250	34	47324

APPLICATION

A combination coupling to provide a transition from EMT to unthreaded rigid conduit or IMC.

FEATURES

- Pre-set and staked Robertson head screws
- Concrete tight when taped

STANDARD MATERIALS



Steel

STANDARD FINISH

Zinc Plated



For EMT Steel Set-Screw to Rigid Set-Screw Couplings

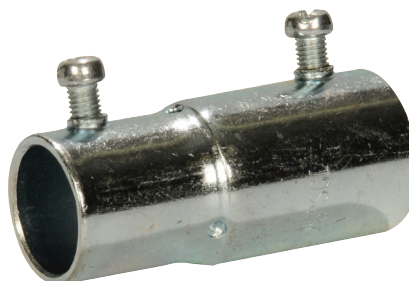

TYPE S18ES

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
S16ES	1/2"	1.000	2.375	0.875	0.938	50	500	14	23016
S17ES	3/4"	1.250	2.813	1.125	1.125	25	250	28	23017
S18ES	1"	1.500	3.000	1.188	1.188	-	25	36	23018