

MALLEABLE IRON 90° LIQUIDTIGHT CONNECTORS

WITH COPPER LUGS FOR LIQUIDTIGHT FLEXIBLE METALLIC CONDUIT

APPLICATION

Connects conduit and terminates bonding conductor run externally across liquidtight conduit.

FEATURES

- Tapered threaded male hub NPT
- Compact, slim diameter with small turning radius
- Furnished with Insulated throat, steel locknut, and sealing ring
- Liquidtight/Raintight/Concrete tight/Oiltight
- Suitable for grounding and wet locations
- Long ferrule prevents pullout and tight bend conduit 'pop-out'
- UL Listed liquidtight flexible metal conduit fittings are suitable for use in the following Hazardous Locations under NEC 501-4(b), 502-4(a)(2); Class I, Div.2; Class II, Div. 1 and 2; and Class III, Div. 1 and 2 and are suitable for grounding in sizes 3/8" through 1-1/2" under NEC 351-I

STANDARD MATERIALS

Malleable Iron/Steel Ferrule/
Copper Grounding Lug


STANDARD FINISH

Zinc Plated/Natural



OPTIONAL FINISH

For additional corrosion protection, specify Mechanical Galvanized. Add suffix 'MG' to Malleable Iron catalog number. Example SLT35CLTMG. For more information, see page 20.

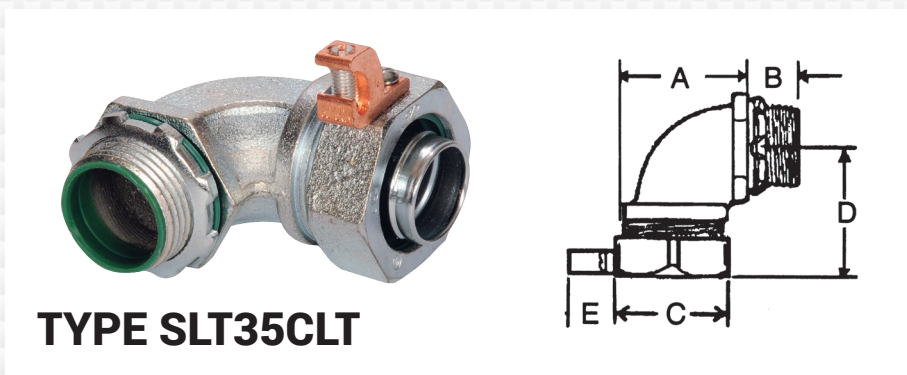

TYPE SLT35CLT

All Furnished with Insulated Throats

CATALOG NUMBER	TRADE SIZE	LUG SIZE	I.D.	O.D.	DIM A	DIM B	DIM C	DIM D	DIM E	UNIT PACK	MASTER PACK	LBS. / 100 PCS.	UPC #
SLT25CLT	3/8"	#4-#14	0.590	0.793	1.31	0.50	1.15	1.37	0.75	10	100	18	50013
SLT35CLT	1/2"	#4-#14	0.590	0.793	1.43	0.50	1.28	1.37	0.75	10	100	20	50014
SLT36CLT	3/4"	#4-#14	0.785	1.020	1.62	0.52	1.55	1.50	0.75	10	100	31	50015
SLT37CLT	1"	#4-#14	0.980	1.261	1.93	0.65	1.80	1.81	0.75	5	50	42	50016
SLT38CLT	1-1/4"	#4-#14	1.330	1.605	2.37	0.66	2.25	1.94	0.75	-	10	57	50017
SLT39CLT	1-1/2"	#4-#14	1.530	1.844	2.68	0.73	2.44	2.40	0.75	-	10	73	50018
SLT40CLT	2"	#4-#14	1.995	2.337	3.18	0.75	2.97	2.64	0.75	-	5	101	50019
SLT65CLT	2-1/2"	#1/0-#8	2.341	2.797	8.31	1.01	4.01	7.81	1.13	-	1	373	50020
SLT66CLT	3"	#1/0-#8	2.939	3.418	9.80	1.15	4.18	9.15	1.13	-	1	465	50021
SLT67CLT	3-1/2"	#3/0-#6	3.406	3.915	11.18	1.18	5.25	11.22	1.50	-	1	686	50022
SLT68CLT	4"	#3/0-#6	3.882	4.411	12.93	1.25	5.78	12.54	1.50	-	1	807	50023

Also available with aluminum lugs. See page 128.

